



Europäisches Patentamt  
European Patent Office  
Office européen des brevets



(11) EP 1 443 661 A1

(12)

# EUROPEAN PATENT APPLICATION

(43) Date of publication:  
04.08.2004 Bulletin 2004/32

(51) Int Cl.7: H04B 1/10, H04L 12/28,  
H04L 12/56

(21) Application number: 03002025.9

(22) Date of filing: 28.01.2003

(84) Designated Contracting States:  
AT BE BG CH CY CZ DE DK EE ES FI FR GB GR  
HU IE IT LI LU MC NL PT SE SI SK TR  
Designated Extension States:  
AL LT LV MK RO

- Dawidowsky, Frank  
Hedelfinger Str. 61, 70327 Stuttgart (DE)
- Guth, Heino  
Hedelfinger Str. 61, 70327 Stuttgart (DE)
- Spallink, Gerd  
Hedelfinger Str. 61, 70327 Stuttgart (DE)
- Höfflinger, Jens  
Hedelfinger Str. 61, 70327 Stuttgart (DE)

(71) Applicant: Sony International (Europe) GmbH  
10785 Berlin (DE)

(72) Inventors:  
• Stadelmeier, Lothar  
Hedelfinger Str. 61, 70327 Stuttgart (DE)

(74) Representative: Müller - Hoffmann & Partner  
Patentanwälte,  
Innere Wiener Strasse 17  
81667 München (DE)

## (54) Method for operating an RLAN arrangement

(57) In a method for operating an RLAN arrangement (1) having a plurality of communication units (10, 20), wherein a step of monitoring the presence or occurrence of signals from external radar sources (100) is performed by at least one of said communication units

being not in a transmission state as a monitoring unit, thereby realizing a continuous and uninterrupted monitoring of a presence of signals of external radar sources (100) over the complete operation time of the RLAN arrangement (1).

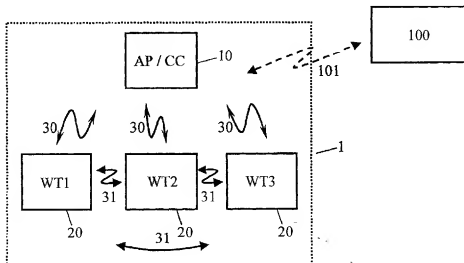


Fig. 1

## Description

[0001] The present invention relates to a method for operating an RLAN arrangement, said RLAN arrangement comprising a plurality of communication units or communication nodes.

[0002] Nowadays, wireless communication with the networks becomes more and more popular. Therefore, in the field of wireless local area networks or WLANs, so-called radio local area networks or RLANs, were introduced. Such an RLAN comprising a plurality of communication units or communication nodes, one of which being a central controller CC or an access point AP and the latter of which being so-called wireless terminals WT.

[0003] As the communication of an RLAN is established by transmitting and receiving radiation in the radio frequency range interference may occur with other and separated RLAN arrangements and/or with external radar services or radar sources.

[0004] In particular, in the 5 GHz band or range communication was until now restricted to radar services and radar devices. Nowadays, said former radar services are referred to as primary users for the 5 GHz band or range, whereas RLAN arrangements or concepts in the 5 GHz band or range are referred to as secondary users. That means, that the complete 5 GHz band or range has to be shared by said primary users or radar services and by said secondary users or RLAN arrangements giving a communication priority to the primary users. In particular the ranges from 5,150 GHz to 5,350 GHz and from 5,470 GHz to 5,725 GHz are allocated to RLANs.

[0005] For establishing and ruling such a sharing concept, regulatory requirements for the secondary users have been established. That means that the presence of primary users has to be checked during the operation of the secondary users. If a primary user occurs and a coincidence overlap of the communication channels has to be expected, the communication channel has to be changed by the secondary users.

[0006] Known methods for monitoring the presence of primary users or radar services are not reliable enough and decrease the communication efficiency during known RLAN arrangements.

[0007] It is, therefore, an object of the present invention to provide a method for operating an RLAN arrangement which is adapted to perform monitoring of primary user or radar/radio services in a particular reliable manner with an reduced effect on the RLAN communication performance.

[0008] The object is achieved by a method for operation an RLAN arrangement according to the characterizing features of independent claim 1. The object is further achieved by an RLAN arrangement, a computer program and a computer readable storage medium according to the characterizing features of independent claims 11, 12, and 13, respectively. Preferred embodiments

of the inventive method for operating the RLAN arrangement are within the scope of the dependent sub claims.

[0009] In the sense of the invention the RLAN arrangement has a plurality of communication units or communication nodes. According to the present invention the method for operating such an RLAN arrangement comprises a step or process of monitoring and/or of detecting the presence of signals of or from external radio sources or radar sources. Upon the presence of signals of or from an external radio source or radar source or upon detection thereof in the case of a coincidence and/or an overlap of an actual communication channel or frequency band of the RLAN arrangement with a channel or frequency band of the signal of or from the external radio source or radar source the actual communication channel or frequency band of the RLAN arrangement is changed. Set step or process of monitoring and/or detecting the presence of signals of or from external radio sources or radar sources is performed by at least one of said communication units or communication nodes which are not in a transmission state. These communication units or communication nodes are used as monitoring units. Thereby, a continuous and uninterrupted monitoring and/or detection of the presence of signals of or from external radio sources or radar sources over the complete operation time of the RLAN arrangement is realized, in contrast to prior art methods for operating RLAN arrangements where the monitoring process is based on the assignment of measurement periods within particular time frames making the protocol and the message exchange comparable complex.

[0010] It is, therefore, a basic idea of the present invention to shift the responsibility for the monitoring and/or detection process to communication units or communication nodes of the RLAN arrangement in question which are not in a state of transmitting information. As in an RLAN arrangement at most one communication unit or communication node is activated in a transmitting or transmission state, all other communication units or communication nodes may potentially be used as monitoring units in the sense of the invention, thereby covering the complete operation time of the RLAN arrangement with respect to the monitoring and/or detecting process.

[0011] Another view of a basic idea of the invention is to provide almost 100% coverage of radar detection. This may additionally or alternatively be achieved by a tx power level adjustment that allows said 100% coverage. A main focus of the invention is the overall coverage and/or on methods to achieve this coverage.

[0012] Although, a single communication unit or communication node is sufficient for entirely or completely covering the operation time of the RLAN arrangement, it is of particular advantage, when said step or process of monitoring and/or detecting the presence of signals of or from external radio sources or radar sources is performed by a plurality of said communication units or

communication nodes being not in a transmission state as a plurality of monitoring units. This may be done in a distributed manner, where a given monitoring time interval may be subdivided or spread over said plurality of monitoring units.

[0013] Additionally or alternatively, said step or process of monitoring and/or detecting the presence of signals of or from external radio sources or radar sources may be performed by the entirety of said communication units or communication nodes being not in a transmission state as a plurality of monitoring units. This gives a higher degree of flexibility and reliability with respect to the process or step of monitoring and/or detecting external radar signals. This may also be done in a distributed manner as already elucidated above.

[0014] According to a further advantageous alternative of the present invention said communication units or communication nodes perform as said monitoring units said step or process of monitoring and/or detecting the presence of signals of or from external radio sources or radar sources at most in a receiving state and/or in a monitoring state, in particular during receiving periods and/or idle/monitoring periods of a MAC frame.

[0015] One has to distinguish between 802.11 networks and HiperLAN2 or HL2 networks.

[0016] In HL2, an AP or a WT, i.e. a wireless terminal, can be in three states, i.e. a transmit state, a receive state, and an idle state. The MAC frame of a device is e.g. 2 ms long and is built by (any) concatenation of these three states. A device listens to the air during idle and receive states and can detect radar signals during these periods.

[0017] In 802.11a or 802.11n networks, there is no dedicated MAC frame. If the device has to send packets it turns into its transmit state. Otherwise it listens to the air. No dedicated 2 ms time framing as in HL2 is given.

[0018] A common bottom line or common principle is that a device can listen for radar services whenever it is not in a transmit state.

[0019] The impact is significant. The notion 'non transmit phases' for radar detection might be relevant instead of a MAC frame expression and its receive and idle states. Whenever talking about MAC framing an example for a HiperLAN2 implementation is given.

[0020] As already indicated above an RLAN arrangement or RLAN consists of communication units or communication nodes one of which being an access point AP or a central controller CC and the remaining being so-called wireless terminals WT or wireless terminal devices.

[0021] Therefore, according to a further preferred embodiment of the present invention a wireless terminal or wireless terminal device as a component of said RLAN arrangement is used as said communication unit or as said communication node, in particular as said monitoring unit.

[0022] Additionally or alternatively, a central controller CC and/or an access point AP as a component of said

RLAN arrangement is used as said communication unit or as said communication node, in particular as said monitoring unit.

[0023] It is always necessary to find a balance with respect to the sensitivity level of the monitoring units. On the one hand, it is necessary to be sensitive enough, so that the important external radio sources or radar sources can be detected or monitored as primary users. On the other hand, it is not necessary to detect such external radio sources or external radar sources which are below a given threshold with respect to said sensitivity level, as those external radio sources or external radar sources may be referred to as distant external sources implying no conflict even when the respective communication channels coincide or overlap. Therefore, for each of said monitoring units a predefined sensitivity level and/or sensitivity threshold is used.

[0024] It is a basic idea to adjust all Tx levels or transmission levels in a way that the receiving levels or Rx levels are between this sensitivity threshold and the receiver sensitivity.

[0025] It is of particular advantage to adapt and/or to set within said receiving periods or in said receiving state said monitoring units to a receiving power level or Rx level which enables stable service receipt or a stable receipt of internal signals which enables a detection of the presence of signals of or from external radio sources or radar sources down to a given predefined threshold, in particular with said given sensitivity level or sensitivity threshold. This may be done by calculation e.g. by transmission power level attenuation or Tx level attenuation.

[0026] Alternatively or additionally, it is of further advantage to adjust and/or to set within transmitting periods or in the transmitting state said communication units or communication nodes continuously to a transmitting power level, which enables a stable service receipt or a stable receipt of internal signals and which enables a detection of the presence of signals of or from external radio sources or radar sources down to a given and predefined threshold, in particular with said given sensitivity level or sensitivity threshold.

[0027] It is always the Tx level that is adjusted. The Rx level on the other side of the communication path varies depending on the Tx level and of course the current attenuation over the air.

[0028] According to a further embodiment of the inventive method upon detection of an interference pattern by a wireless terminal a message CHANNEL\_INTERFERENCE\_DETECTION announcing a detection of an

interference pattern is sent from said detecting wireless terminal to a central controller and/or wherein upon receipt of a message

CHANNEL\_INTERFERENCE\_DETECTION announcing a detection of an

interference pattern a message CHANNEL\_INTERFERENCE\_DETECTION\_ACK indicating the acknowledgement of said message

CHANNEL\_INTERFERENCE\_DETECTION is sent by said central controller.

[0029] The basic idea of the messages related to the invention is simple: When having autonomous radar detection, we need a new mechanism for the WTs to inform the CC/AP about the detection of a radar signal. Exactly that's the purpose of this messages.

[0030] It is a further aspect of the present invention to provide an RLAN arrangement which is capable of performing or realizing the inventive method for operating an RLAN arrangement and/or the steps thereof.

[0031] According to a further aspect of the present invention a computer program is provided comprising computer program means being adapted to realize the inventive method for operating an RLAN arrangement or the steps thereof when it is executed on a computer, a digital signal processing means or the like.

[0032] Further, according to the present invention a computer readable storage medium is provided comprising the inventive computer program.

[0033] These and further aspects of the present invention will become more elucidated taking into account the following remarks:

[0034] RLANs are secondary users in the 5GHz frequency band. Therefore, they have to prevent interference with primary users, namely radar services. The dynamic frequency selection or DFS algorithms that are used so far are based on an assignment of measurement periods during transmission pauses. Reliable radar detection is so far not possible without significant restrictions regarding data traffic and the available bandwidth.

[0035] The invention proposes a mechanism that allows the detection of radar systems for 100% of the operation time. Further, appropriate receiving power adjustment allows autonomous measurements of each device without any disturbance of or by the data traffic. Control messages indicating a radar detection to the Wireless Controller are introduced.

[0036] The current HiperLAN/2 standard specifies messages related to a DFS algorithm which only allow the detection of the received signal strength. The DFS mechanism in the HiperLAN/2 standard does not specify any messages or algorithms to detect radar. In the original sense, DFS was intended to detect interference from other RLANs.

[0037] This standard also allows a change of the operating frequency initiated by the controller. The DFS algorithm is not specified in the HiperLAN/2 standard. It is intended to be used to distribute the operating frequency of the wireless HL/2 networks equally across the frequency band.

[0038] In the IEEE 802.11a specification, no algorithm for frequency change and DFS measurements is specified.

[0039] IEEE 802.11h specifies spectrum management for IEEE802.11a. This document is published as a draft.

[0040] The DFS approaches used by both standards are based on the assignment of measurement periods, while the present invention inverts this approach by performing autonomous radar detection.

[0041] In Europe, the 5GHz band is open for so called "primary users" like Mobile Satellite Services and for "secondary users" like RLANs. The regulatory requirements for secondary users are that a test for the presence of primary users. If a primary user is found another channel must be used and that even, if no primary user is present, the RLANs distribute themselves equally across the frequency band

[0042] The detection mechanisms that are used so far by the DFS (Dynamic Frequency Selection) algorithms are based on an assignment of measurement periods by the network controller, e.g. AP or CC in HiperLAN/2. The controller can ask Wireless Terminals (WTs) to measure within a dedicated time frame, e.g., in multiples of one MAC frame, for interferers. This means additional complexity of the protocol and additional message exchange overhead in the wireless network. There are basically two measurement possibilities.

[0043] In the first, CC stops all traffic during the measurement period. Although the detection probability of the radar is best, this solution has the big disadvantage of interruption of data traffic. This might be acceptable for data transmissions but is not for services that require a constant bandwidth like video streams ('Quality of Service').

[0044] In the second, WT measures only when no traffic is on air (percentile measurements). The WT is asked to detect radars only in parts of the MAC frame without traffic. Radar pulses that might occur during traffic phases are not recognized if the power level of the RLAN connection is too high.

[0045] Disadvantages are that the network can not look every time for radar signals and that only parts of the MAC frame can be used for radar detection.

[0046] Measurements on the RF channel are always performed over a time frame of at least one MAC frame. Distributed measurements of several WTs within one MAC frame are so far not possible.

[0047] This invention describes an approach where 100% of each MAC frame can be used for listening to interferers without any restrictions to data traffic.

[0048] A typical 5 GHz transceiver system consists of an antenna, an RF frontend, a baseband processing unit as well as a micro processor to manage the user data traffic as well as the network control commands. The baseband DSP contains a radar detection unit that reports the occurrence of potential radar systems to the Micro Controller.

[0049] One idea of this invention is to move the responsibility for radar detection to the WTs - without dedicated assignment of measurement periods. Each device looks autonomously during 100% of its receiving time and the idle times of the MAC frame for radar services. Only during a transmission time the device cannot

detect radars. During this time frame another device performs radar detection as only one device can transmit at a given point in time. Overall 100% coverage for radar detection is achieved.

[0050] Radar detections may be reported immediately by the WT to the controller of the network. In order to guarantee the radar detection during receiving periods the power level of the received connection has to be adjusted in a way that stable transmission of the services is still possible and that radar services at the requested threshold can be detected.

[0051] Adjustment of the power level is part of the standards (e.g. in HiperLAN2 RLC-ULINK-PC-CALIBRATION and RLC\_DM\_POWER\_CONTROL, ...).

[0052] The draft ETSI standard ETSI EN 301 893 defines the level of incoming radar signals that have to be detected to a certain level. Weaker radar signals mean high distance to the radar source and therefore no impact of the RLAN to the radar. Stable transmission, even when using the less robust phy mode, shall be possible down to at least another certain level (see ETSI standard ETSI TS 101 475).

[0053] If the receiving level of the connections is adjusted appropriately both conditions mentioned above can be fulfilled. All 5 GHz wireless technologies that require radar detection have appropriate control commands to adjust the power level in the desired way.

[0054] Since all devices in the wireless network measure autonomously to detect radar signals a new control message mechanism is needed to inform the controller of the network about the radar occurrence. The control flow for radar detection becomes easier since the request response mechanism is replaced by a simple reporting mechanism that is triggered by the measuring device itself.

[0055] New control messages can be used to inform the controller about an interfering event:

#### CHANNEL\_INTERFERENCE\_DETECTION:

##### Functionality:

[0056] WT informs controller about the detection of an interferer on the current RF channel.

##### Parameters:

##### [0057]

INTERFERER	informs the controller about the type of interferer
0	primary user (radar)
1	RLAN of same type (preamble can be decoded)
2	unknown RLAN type (preamble can't be decoded)
3	unknown interferer

#### CHANNEL\_INTERFERENCE\_DETECTION\_ACK:

##### Functionality:

[0058] Controller acknowledges the incoming CHANNEL\_INTERFERENCE\_DETECTION message

##### Parameters:

NONE

##### Ideas and advantages of the inventions:

[0059] Three main ideas are part of this invention are to

- adjust the transmission power level between the radar detection threshold and the receiver sensitivity,
- radar detection process in all non-transmission phases or in all phases of the MAC frame, except in own transmission phases, and
- perform the radar detection autonomously, whenever possible and needs no control/assignment from a controlling instance.

[0060] Above mentioned mechanisms give following advantages that

- the radar detection can be achieved 100% of the time without interruption of data traffic and that
- a simpler protocol is given.

[0061] In the following, the invention will be described in more detail taking reference to the accompanying figures on the basis of preferred embodiments of the invention.

Fig. 1 is a schematical block diagram illustrating an RLAN arrangement which can be operated by the inventive method.

Fig. 2 is a schematical block diagram of a communication unit or communication node which can be used in the inventive method for operating an RLAN arrangement.

Fig. 3 demonstrates the different power levels and their adjustment according to the present invention.

Fig. 4 demonstrates the different time periods which can be used for a radar detection according to the present invention.

Fig. 5 is a flow chart of the inventive radar detection mechanism.

Fig. 6 is a block diagram demonstrates a typical

state machine for the inventive radar detection mechanism.

**Fig. 7** is a block diagram of a further example of a state machine for the inventive radar detection mechanism.

[0062] In the following, same elements and functions are indicated by the same reference symbols, and their detailed description is not repeated for each occurrence thereof.

[0063] Fig. 1 demonstrates the basic structure of an RLAN arrangement 1 which can be used within the present invention. The RLAN arrangement 1 in question is built up by a variety of communication units 10, 20 or communication nodes 10, 20. This variety is constituted by a single access point AP or central controller CC by which the entire RLAN arrangement 1 and its operation are controlled. Further, wireless terminals WT1 to WT3 are provided. First and second communication channels 30, 31, respectively, establish the communication of the wireless terminals WT1 to WT3 with the access point AP or central controller CC and to the other wireless terminals WT1 to WT3, respectively.

[0064] In spatial relation to the RLAN arrangement 1 an external radio source 100 or radar source 100 is given being capable to realize communication or to emit external signals via a communication channel 101.

[0065] The present invention is adapted to check during the operation time of the RLAN arrangement 1 on whether or not there is a coincidence of the communication channel 101 of the external radar source 100 with at least one of the communication channels 30 or 31 of the RLAN arrangement 1, in which case the actual communication channel 30, 31 of the RLAN arrangement has to be changed.

[0066] A basic idea of the present invention is that the responsibility for the step or process of monitoring and/or detecting the presence of signals of or from the external radio source or radar source 100 is given to at least one of the communication units 10, 20 or communication nodes 10, 20 which are not in a state of transmission. Therefore, any of the wireless terminals WT1 to WT3 or the central controller CC which are not transmitting at the given time period may be used as a monitoring unit for monitoring and/or detecting the presence of signals of or from external radio sources or radar sources 100. The block diagram of Fig. 2 elucidates in more detail the internal structure of anyone of the communication nodes 10, 20 or communication units 10, 20 shown in Fig. 1. Each of the communication units 10, 20 or communication nodes 10, 20 consists of an antenna 11, 21, a RF section 12, 22, followed by a base band digital signal processor 13, 23 which comprises a radar detector 14, 24. Additionally, a microprocessor 15, 25 is provided which is connected to the base band DSP 13, 23 and on the other side which external interfaces via a respective external terminal 16, 26.

[0067] Figure 3 illustrates the adjustment of the power levels. The blocks of section I show the different parts of a MAC frame with the different receiving levels, when no appropriate power adjustment is done. Typically the receiving levels are above the requested radar detection threshold, i.e., radar detection is only possible during MAC frame periods without data traffic.

[0068] The blocks of section II illustrate the same MAC frame with the proposed power adjustments. Since the target power level is between the radar detection threshold as well as the requested sensitivity of the receiver it is possible to guarantee stable data traffic on the RLAN as well as secure detection of radars even during receiving periods.

[0069] Finding the best performing target power level is platform dependant and will vary from solution to solution.

[0070] In the example above with three devices in the network (CC, WT1 and WT2) all typical types of traffic are covered, namely in a central mode unicast connections between the CC and a WT, in a direct mode connection between two WTs, and multicast/broadcast connections with one sender. In this latter case it is enough to decrease the Tx power level of the sender until one receiver is adjusted to the target power level. This device can perform radar detections. All other receivers may remain above this power level.

[0071] Figure 4 shows the different time periods that can be used for radar detection (depicted time: 2 MAC frames):

[0072] As depicted in the bottom line "overall radar detection" of the diagram an overall 100% coverage of radar detection can be achieved with the proposed mechanism. The old method for 'in traffic' measurements (percentile measurements) allows for less measurement periods the higher the traffic load of the network is.

[0073] Fig. 5 elucidates by means of two block diagrams preferred embodiments of the inventive method for operating an RLAN arrangement. The left-hand side of Fig. 5 relates to the performance of a wireless terminal WT1 to WT3, whereas the right-hand side of Fig. 5 relates to the performance of a central controller CC or access point AP.

[0074] In the performance of a wireless terminal WT1 to WT3 or 20 in a first step S51a a wireless terminal WT1 to WT3 is in a receiving state and simultaneously monitors the possible presence of external signals stemming from an external radar source 100.

[0075] In a step S52a it is checked, if an interference pattern was detected. If this is not the case the proceedings continue with a step S53a for monitoring the RF channel. In a following step S54a again a check with respect to possible detected interference patterns is performed. If this is not the case, in the following step S55a data are sent out. In each case of a detection of interference patterns the proceedings branch to steps S56a und S57a for transmitting a detection message to

the central controller CC and to receive an acknowledgement message from the central controller CC, respectively.

**[0076]** The performance for the central controller CC 10 starts with the process S51b of sending out data. In a following step S53b the RF channel is monitored. In the following step S54b the channel is checked for detected interference patterns. If there are not detected interference patterns data are received and the channel is again monitored in step S55b. In the following step S58b it is again checked on whether or not interference patterns are detected. In each case of detected interference patterns new operating frequency or frequency bands are announced to other devices and then the operating frequency or communication frequency band are changed in step S59b.

**[0077]** Figs. 6 and 7 describe by means of block diagrams different state machines for the inventive method for operating an RLAN arrangement.

#### List of Reference Symbols

#### [0078]

1	RLAN arrangement, RLAN, radio local area network	25
10	communication unit, communication node, access point, central controller	
11	antenna	
12	RF stage	
13	base band DSP, base band digital signal processor	30
14	radar detector	
15	micro processor	
16	external terminal	
20	communication unit, communication node, wireless terminal	35
21	antenna	
22	RF stage	
23	base band DSP, base band digital signal processor	40
24	radar detector	
25	micro processor	
26	external terminal	
30	communication channel of the RLAN, frequency band	45
31	communication channel of the RLAN, frequency band	
100	external radio source, external radar source	
101	external communication channel, external frequency band	50
AP	access point	
CC	central controller	
WT1	wireless terminal	
WT2	wireless terminal	
WT3	wireless terminal	

#### Claims

- Method for operating an RLAN arrangement which has a plurality of communication units (10, 20) or communication nodes (10, 20),
  - comprising a step or process of monitoring and/or of detecting the presence of signals of or from external radio sources or radar sources (100),
  - wherein upon the presence of signals of or from an external radio source or radar source (100) or upon detecting thereof in the case of a coincidence and/or overlap of an actual communication channel (30) or frequency band of the RLAN arrangement (1) with a channel (101) of the signal of or from the external radio source or radar source (100) the actual communication channel (30) or frequency band is changed, and
  - wherein said step or process of monitoring and/or detecting the presence of signals of or from external radio sources or radar sources (100) is performed by at least one of said communication units (10, 2) or communication nodes (10, 20) as monitoring units being not in a transmission state,
  - thereby realizing a continuous and uninterrupted monitoring or detection of the presence of signals of or from external radio sources or radar sources (100) over the complete operation time of the RLAN arrangement (1).
- Method according to claim 1,
  - wherein said step or process of monitoring and/or detecting the presence of signals of or from external radio sources or radar sources (100) is performed by a plurality of said communication units (10, 2) or communication nodes (10, 20) being not in a transmission state as a plurality of monitoring units, in particular in a distributed manner.
- Method according to anyone of the preceding claims,
  - wherein said step or process of monitoring and/or detecting the presence of signals of or from external radio sources or radar sources (100) is performed by an entirety of said communication units (10, 2) or communication nodes (10, 20) being not in a transmission state as an entirety of monitoring units, in particular in a distributed manner.
- Method according to anyone of the preceding claims,
  - wherein said communication units (10, 20) or communication nodes (10, 20) perform as said monitoring units said step or process of monitoring and/or detecting the presence of signals of or from external

radio sources or radar sources (100) at most in a receiving state and/or in a monitoring state, in particular during receiving periods and/or idle monitoring periods of a non-transmit phase and/or a MAC frame.

5. Method according to anyone of the preceding claims,

wherein a wireless terminal (WT1, WT2, WT3) or a wireless terminal device as a component of said RLAN arrangement is used as said communication unit (20) or as said communication node (20), in particular as said monitoring unit.

6. Method according to anyone of the preceding claims,

wherein a central controller (CC) and/or an access point (AP) as a component of said RLAN arrangement is used as said communication unit (10) or as said communication node (10), in particular as said monitoring unit.

7. Method according to anyone of the preceding claims,

wherein for said monitoring units a predefined sensitivity level and/or a predefined sensitivity threshold is used.

8. Method according to anyone of the preceding claims,

wherein within said receiving periods and/or in said receiving state said monitoring units are continuously adjusted and/or set to a receiving power level,

- which enables a stable service receipt or stable receipt of internal signals of the RLAN arrangement, and
- which enables a detection of the presence of signals of or from external radio sources or radar sources (100) down to a given and predefined threshold, in particular with said given sensitivity level or sensitivity threshold.

9. Method according to anyone of the preceding claims,

wherein within transmitting periods or in said transmitting state said communication units (10, 20) and/or communication nodes (10, 20) are continuously adjusted and/or set to a transmitting power level

- which enables a stable service receipt or stable receipt of internal signals of the RLAN arrangement, and
- which enables a detection of the presence of signals of or from external radio sources or radar sources (100) down to a given and predefined threshold, in particular with said given sensitivity level or sensitivity threshold.

10. Method according to any one of the preceding claims,

- where upon detection of an interference pattern by a wireless terminal (WT) a message CHANNEL\_INTERFERENCE\_DETECTION announcing a detection of an interference pattern is sent from said detecting wireless terminal to a central controller (CC) and/or
- wherein upon receipt of a message CHANNEL\_INTERFERENCE\_DETECTION announcing a detection of an interference pattern a message CHANNEL\_INTERFERENCE\_DETECTION\_ACK indicating the acknowledgement of said message CHANNEL\_INTERFERENCE\_DETECTION is sent by said central controller (CC).

11. RLAN arrangement,

which is capable of performing or realizing the method for operating an RLAN arrangement according to anyone of the preceding claims 1 to 10, and/or the steps thereof.

12. Computer program product,

comprising computer program means adapted to perform and/or to realize the method for operating an RLAN arrangement according to anyone of the claims 1 to 10 and/or the steps thereof, when it is executed on a computer, a digital signal processing means, and/or the like.

13. Computer readable storage medium,

comprising a computer program product according to claim 12.



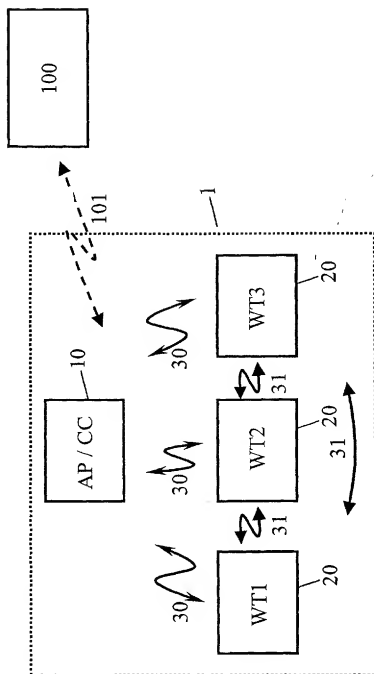


Fig. 1

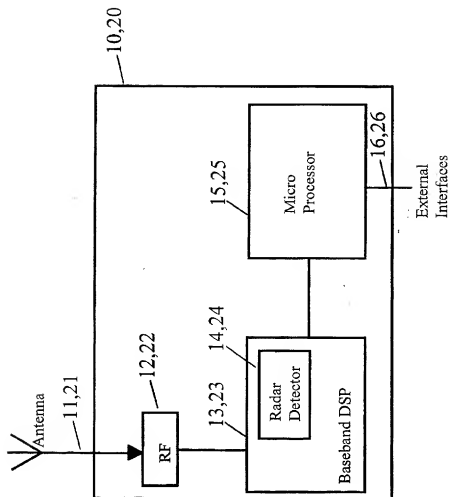


Fig. 2

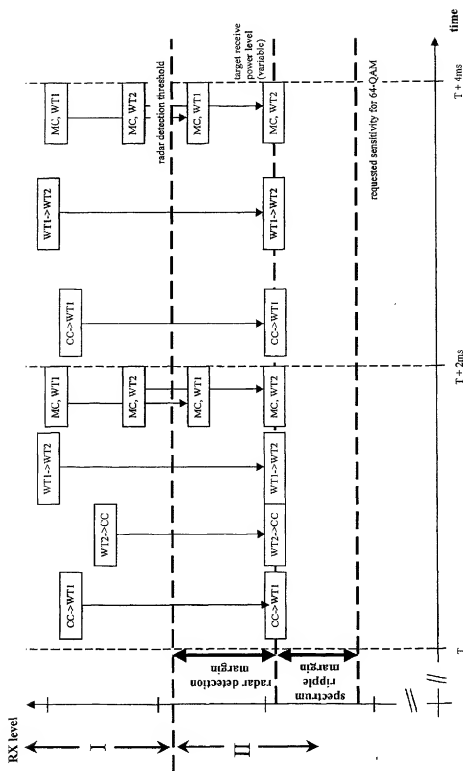


Fig. 3

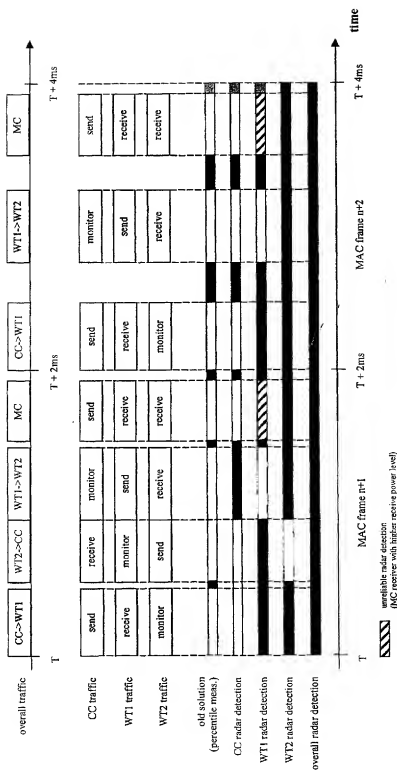


Fig. 4

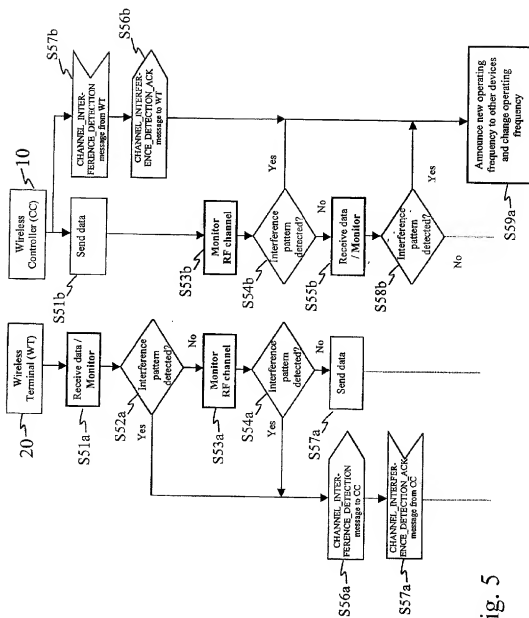


Fig. 5

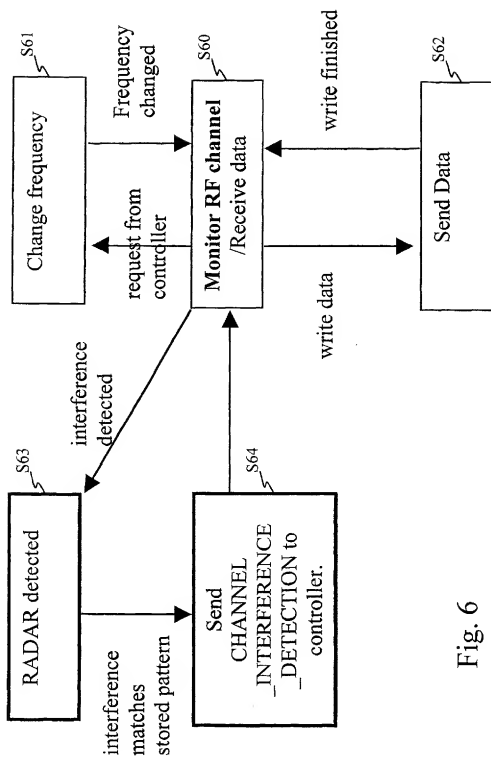


Fig. 6

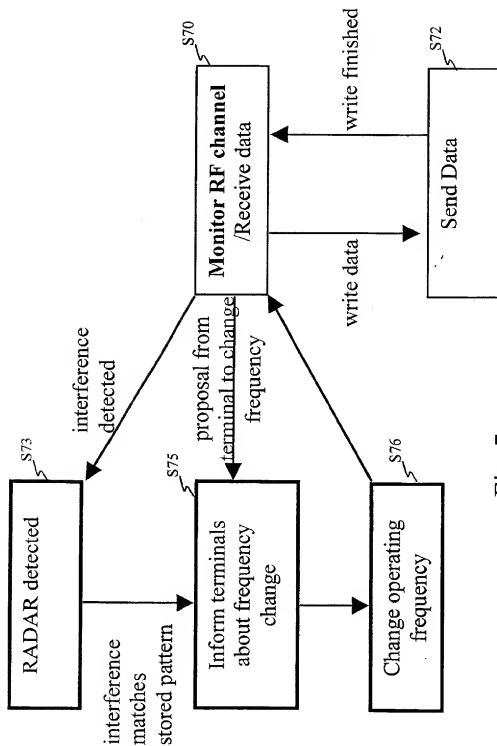


Fig. 7



European Patent  
Office

## EUROPEAN SEARCH REPORT

Application Number  
EP 03 00 2025

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (int.Cl.7)
X	EP 1 248 477 A (ERICSSON TELEFON AB L M) 9 October 2002 (2002-10-09) * column 3, line 42 - column 4, line 1 * * column 4, line 23 - column 4, line 25 * * column 4, line 46 - column 4, line 50 * * column 5, line 29 - column 5, line 34 * * column 10, line 23 - column 10, line 27 * * * claim 10 * * figures 4-6 *	1-13	H04B1/10 H04L12/28 H04L12/56
E	EP 1 298 949 A (MOTOROLA INC) 2 April 2003 (2003-04-02) * paragraphs [0022], [0026], [0027], [0030] - [0032], [0041] * * figures 4-7 *	1-7, 10-13	
A	ETSI: "Broadband Radio Access Networks (BRAN); HIPERLAN Type 2; Data Link Control (DLC) layer; Part 2: Radio Link Control (RLC) sublayer" ETSI TS 101 761-2 V1.3.1, January 2002 (2002-01), pages 1-4, 72-88, XP002247210 * page 72 - page 88 *	1-10	TECHNICAL FIELD SEARCHED (int.Cl.7)  H04B H04L H04Q
A	WO 03 001742 A (COMPRIZE VENTURES LTD ; ALTMAN BARUCH (IL)) 3 January 2003 (2003-01-03) * page 5, line 9 - page 12, line 30 * * page 37, line 16 - page 37, line 22 * * page 23, line 14 - page 24, line 4 *	1,2,5-7, 9,10	
A	EP 0 579 372 A (NCR INT INC) 19 January 1994 (1994-01-19) * column 3, line 38 - column 4, line 22 * * column 7, line 35 - column 7, line 50 * -----	1,8,9	
The present search report has been drawn up for all claims			
Place of search		Date of completion of the search	Examiner
THE HAGUE		10 July 2003	Brezmes Alonso, F
CATEGORY OF CITED DOCUMENTS		T: theory or principle underlying the invention E: earlier patent document, but published on, or after the filing date D: document cited in the application L: document cited for other reasons	
X: particularly relevant if taken alone Y: particularly relevant if combined with another document of the same category A: bibliographical background O: non-written document P: intermediate document		A: member of the same patent family, corresponding document	

EP 03 00 2025 (2003-01-03)



**ANNEX TO THE EUROPEAN SEARCH REPORT  
ON EUROPEAN PATENT APPLICATION NO.**

EP 03 00 2825

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report.  
The members are as contained in the European Patent Office EPO file on  
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

10-07-2003

Patent document cited in search report		Publication date	Patent family member(s)		Publication date
EP 1248477	A	09-10-2002	EP	1248477 A1	09-10-2002
			WO	02682844 A2	17-10-2002
-----					
EP 1298949	A	02-04-2003	EP	1298949 A1	02-04-2003
			WO	03030577 A1	10-04-2003
-----					
WO 03001742	A	03-01-2003	WO	03001742 A1	03-01-2003
-----					
EP 0579372	A	19-01-1994	EP	0579372 A2	19-01-1994
			JP	3340604 B2	05-11-2002
			JP	7283812 A	27-10-1995
			US	5553316 A	03-09-1996
-----					

EPO FORM 1000

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82